



EP 1 193 844 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.04.2002 Bulletin 2002/14

(51) Int Cl.7: **H02K 33/16**

(21) Application number: 01250228.2

(22) Date of filing: 20.06.2001

(84) Designated Contracting States:
 AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
 MC NL PT SE TR
 Designated Extension States:
 AL LT LV MK RO SI

- Hirata, Katsuhiro
Kadoma-shi, Osaka (JP)
- Arikawa, Yasushi
Kadoma-shi, Osaka (JP)
- Yamada, Tomio
Kadoma-shi, Osaka (JP)
- Yabuuchi, Hidekazu
Kadoma-shi, Osaka (JP)
- Inoue, Hiroki
Kadoma-shi, Osaka (JP)

(30) Priority: 29.09.2000 JP 2000300891

(71) Applicant: **Matsushita Electric Works, Ltd.**
Kadoma-shi, Osaka (JP)

(72) Inventors:
• Ichii, Yoshitaka
Kadoma-shi, Osaka (JP)

(74) Representative: Pfenning, Meinig & Partner
Mozartstrasse 17
80336 München (DE)

(54) **Linear oscillator**

(57) The invention relates to a linear oscillator which comprises a moving part (1) reciprocating a case (10) containing incorporating said moving part and an amplitude control spindle (9) supported in said case to be movable. The configuration is such that said moving part and said amplitude control spindle reciprocate at a resonance frequency of said linear oscillator or a frequency in a vicinity thereof.

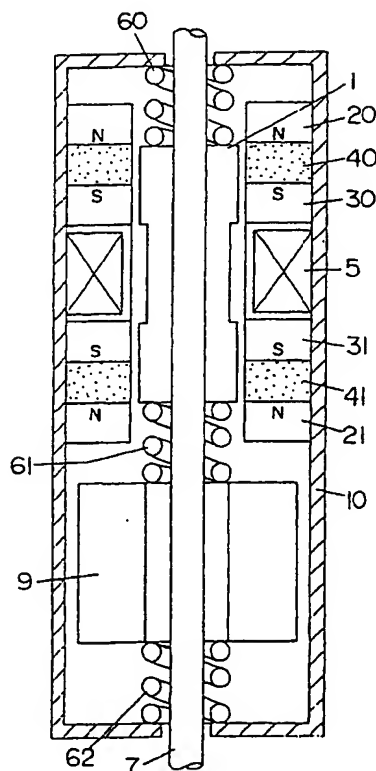


Fig. 1

EP 1 193 844 A1

Description

BACKGROUND OF THE INVENTION

5 Field of the Invention

[0001] The invention relates to a linear oscillator in which a moving part thereof reciprocates.

Description of the Related Art

10

[0002] There has been employed such a linear oscillator using a motion direction converting mechanism to convert a motor revolutionary motion into a reciprocating linear motion that can be used in a driving part for use in mechanical control or of an electric razor or a power tooth brush.

15

[0003] In this case, however, there would rise various problems due to a mechanical loss or noise occurring at the motion direction converting mechanism and a difficulty in miniaturization.

20

[0004] Besides the above, there has been known such a linear oscillator that uses no motion direction converting mechanism to reciprocate the moving part to axially by use of an electromagnetic force as well as by use of a resonance frequency determined by a spring force of a spring member having the moving part as a spring oscillation system and a mass of the moving part, however this causes high vibration because of inertia force of the moving part.

SUMMARY OF THE INVENTION

25

[0005] In view of the above, it is an object of the invention to provide a linear oscillator that gives a low vibration and small noise and can be miniaturized.

30

[0006] Thus, an aspect of Claim 1 is a linear oscillator comprising a moving part moving reciprocally, a case containing the moving part, and an amplitude control spindle supported in the case to be movable, in which the moving part and the vibration control spindle reciprocate at a resonance frequency or in its vicinity. The amplitude control spindle is thus provided to conduct control so as to absorb or increase an amplitude due to a reaction of the moving part when it is reciprocating.

35

[0007] An aspect of Claim 2 is the linear oscillator according to Claim 1 comprising an electromagnetic driving part reciprocating the moving part and a spring member making up a spring oscillation system disposed at least between the case and the moving part and between the case and the amplitude control spindle, in which a resonance frequency of the spring oscillation system is equal to that of the linear oscillator and in its vicinity.

40

[0008] An aspect of Claim 3 is the linear oscillator according to Claim 1, in which the moving part and the amplitude control spindle moves in phases opposite to each other and reciprocate at a resonance frequency.

45

[0009] An aspect of Claim 4 is the linear oscillator according to Claim 2, in which the spring member includes a first spring disposed between a fixed part including the case and the electromagnetic driving part and the moving part, a second spring disposed between the moving part and the amplitude control spindle, and a third spring disposed between the amplitude control spindle and the fixed part.

50

[0010] An aspect of Claim 5 is the linear oscillator according to Claim 1, wherein the electromagnetic driving part includes a coil, to use its coil current in order to enable controlling the reciprocating motion.

55

[0011] An aspect of Claim 6 is the linear oscillator according to Claim 5, in which the electromagnetic driving part includes a coil surrounding an outer periphery of the moving part, second yokes disposed at both ends of the coil, a pair of permanent magnets which are provided at an end face of each of the second yokes and also which are magnetized symmetrically with respect to the center of the coil, and first yokes provided on the sides of the permanent magnets opposite to the second yokes.

[0012] An aspect of Claim 7 is the linear oscillator according to Claim 1, in which a shaft for taking out a motion output is connected as a connection element to the moving part or the amplitude control spindle.

60

[0013] An aspect of Claim 8 is the linear oscillator according to Claim 4, in which the second spring is stronger than the first and third springs.

65

[0014] An aspect of Claim 9 is the linear oscillator according to Claim 1, in which the amplitude control spindle is provided with a rocking preventing means for preventing rocking.

70

[0015] An aspect of Claim 10 is the linear oscillator according to Claim 2, in which the spring member is formed of a coil spring and the mass of the amplitude control spindle and its connection element is larger than the mass of the moving part and its connection element.

75

[0016] An aspect of Claim 11 is the linear oscillator according to Claim 2, in which the spring member is formed of a leaf spring and the mass of the amplitude control spindle and its connection element is smaller than the mass of the moving part and its connection element.

[0017] An aspect of Claim 12 is the linear oscillator according to Claim 6, in which at least a portion facing the electromagnetic driving part in the case is formed of an electromagnetic substance and the thickness of the portion facing the electromagnetic driving part is 7% or larger of an outer diameter of the permanent magnet.

[0018] An aspect of Claim 13 is the linear oscillator according to Claim 6, in which a magnetic flux increasing means is provided which increases magnetic flux running toward the moving part.

[0019] An aspect of Claim 14 is the linear oscillator according to Claim 6, in which a first yoke has a triangular cross section which has its sloped side facing the case.

[0020] An aspect of Claim 15 is the linear oscillator according to Claim 7, in which part or the whole of the shaft is made of a nonmagnetic substance.

[0021] An aspect of Claim 16 is the linear oscillator according to Claim 15, in which only a portion of the moving part passing through the shaft is made of a nonmagnetic substance.

[0022] An aspect of Claim 17 is the linear oscillator according to Claim 6, in which the yoke or the moving part is provided with an eddy current loss reducing means for reducing an eddy current loss.

[0023] An aspect of Claim 18 is the linear oscillator according to Claim 17, in which the moving part has an amplitude-directional slit formed therein.

[0024] An aspect of Claim 19 is the linear oscillator according to Claim 6, in which the moving part has a large diameter portion at its both ends in its reciprocating direction and a small diameter portion at its center in such a configuration that a boundary between the large diameter and small diameter portions roughly agrees with the end faces of the second yokes on the side of the coil and both end faces of the moving part in its reciprocating direction roughly agree with the end faces of the permanent magnets on the sides of the first yokes respectively.

[0025] An aspect of Claim 20 is the linear oscillator according to Claim 6, in which a gap between the outer circumferential surface of the moving part and the inner circumferential surface of the yoke is non-uniform in an revolutionary direction.

[0026] An aspect of Claim 21 is the linear oscillator according to Claim 7, comprising a revolution restricting means for restricting revolution of the shaft.

[0027] An aspect of Claim 22 is the linear oscillator according to Claim 21, in which the spring member acts as the revolution restricting means.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028]

FIG. 1 is a cross-sectional view of one embodiment of the invention;

FIG. 2 shows a model of the embodiment;

FIG. 3 is a cross-sectional view of another embodiment of the invention;

FIG. 4 is a cross-sectional view of further embodiment of the invention;

FIG. 5 is a cross-sectional view of still further embodiment of the invention;

FIG. 6 is a cross-sectional view of an additional embodiment of the invention;

FIG. 7 is a cross-sectional view of an additional embodiment of the invention;

FIG. 8 is a cross-sectional view of an additional embodiment of the invention;

FIG. 9 is a cross-sectional view of an additional embodiment of the invention;

FIG. 10 is a cross-sectional view of an additional embodiment of the invention;

FIG. 11 is a cross-sectional view of an additional embodiment of the invention;

FIG. 12 is a cross-sectional view of an additional embodiment of the invention;

FIG. 13 is a perspective view of the plunger of the above embodiment;

FIG. 14 is a cross-sectional view of an additional embodiment of the invention;

FIG. 15 is a cross-sectional view of an additional embodiment of the invention;

FIG. 16A is a cross-sectional view taken along line A of FIG. 15, FIG. 16B is that taken along line B of FIG. 15,

and FIG. 16C is that taken along line C of FIG. 15;

FIG. 17 is a cross-sectional view of an additional embodiment of the invention;

FIG. 18 is a cross-sectional view of an additional embodiment of the invention;

FIG. 19 is a cross-sectional view of an additional embodiment of the invention;

FIG. 20 is a cross-sectional view of an additional embodiment of the invention;

FIG. 21A is a cross-sectional view of an additional embodiment and FIG. 21B, a partial end elevation thereof; and

Fig. 22 is a cross-sectional view of an additional embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0029] FIG. 1 shows one embodiment of the invention, in which a cylindrical plunger 1 made of a magnetic substance such as iron constituting the moving part housed in the case has a large diameter at its both ends and a small diameter at its center in such a configuration that through the plunger 1, an output-take-out shaft 7 is pierced and fixed therein as a connection element and on the periphery of the plunger 1 is provided a coil 5. At both axial ends of the above-mentioned annular coil 5 fixed on the inner surface of a shield case 10 acting as the case are provided annular permanent magnets 40 and 41 magnetized symmetrically with respect to the coil 5, so that between the magnets 40 and 41 and the coil 5 are provided annular second yokes 30 and 31, and on the sides of the magnets 40 and 41 opposite to the yokes 30 and 31 are provided annular first yokes 20 and 21 respectively. Those coil 5, permanent magnets 40 and 41, and yokes 30, 31, 20, and 21 are combined to make up an electromagnetic driving part. Between one end face of the above-mentioned plunger 7 and the shield case 10 is provided a spring 60, while between the other end face of the plunger 7 and the shield case 10 are provided a spring 61, an amplitude control spindle 9, and a spring 62 in this order. A spring member (springs 60, 61, and 62) is provided as a spring oscillation system for energizing the moving part axially, supporting the amplitude control spindle to the case to be movable. The plunger and the amplitude control spindle reciprocate at a resonance frequency of the spring oscillation system. This resonance frequency is equal (or vicinal) to that of the linear oscillator. Although the spring member (springs 60, 61, and 62) employs a coil spring easy to obtain a relatively large amplitude, any other appropriate springs may be used.

[0030] When the coil 5 has no current flowing therethrough, the plunger 1 stands still at a shown position where a magnetic force which the permanent magnets 40 and 41 have on the plunger 1 via the yokes 20, 30, 21, and 31 is balanced with a spring force of the springs 60, 61, and 62. When the coil 5 has a current flowing in one direction therethrough, the magnetic flux of either one of the two permanent magnets 40 and 41 is weakened and so the plunger moves toward the other magnet as against the force of the spring 60, and when the coil 5 has a current flowing in the opposite direction therethrough, on the other hand, the plunger 1 still moves in the opposite direction, so that by flowing an alternating current through the coil 5, the plunger 1 reciprocates axially; thus enabling controlling of the reciprocating motion by a coil current.

[0031] If, in this case, attention is paid to the axial motion of such moving parts as the plunger 1, the shaft 7, and the amplitude control spindle 9, it is known that there are provided the above-mentioned springs 60, 61, and 62 made up of a coil spring to permit this linear oscillator to be handled as such a three-mass-point system oscillation modes as shown in FIG. 2, so that if it is assumed that the electromagnetic driving part having the coil 5 as the main body and the shield case 10 act as the fixed part and that m_1 represents mass of the moving part, m_2 represents mass of the vibration control spindle, m_3 represents mass of the fixed part, k_1 represents a spring coefficient of the spring 60, k_2 represents a spring coefficient of the spring 61, k_3 represents a spring coefficient of the spring 62, c_1 represents an attenuation coefficient of the spring 60, c_2 represents an attenuation coefficient of the spring 61, and c_3 represents an attenuation coefficient of the spring 62, the motions at the time of free oscillation of those three mass points of the above-mentioned oscillation system can be determined by motion equations (1), (2), and (3) and also, if values of $m_1=m_2$, $k_1=k_3$, $c_1=c_3$, and m_3 is sufficiently large as compared to m_1 and m_2 , equations (4) and (5) can be solved by solving the above-mentioned equations, where the attenuation term is omitted in the equations (4) and (5).

$$m_1 \ddot{x}_1 + c_1 (\dot{x}_1 - \dot{x}_3) + c_2 (\dot{x}_1 - \dot{x}_2) + k_1 (x_1 - x_3) + k_2 (x_1 - x_2) = 0 \quad \cdot \cdot \cdot (1)$$

$$m_2 \ddot{x}_2 + c_2 (\dot{x}_2 - \dot{x}_1) + c_3 (\dot{x}_2 - \dot{x}_3) + k_2 (x_2 - x_1) + k_3 (x_2 - x_3) = 0 \quad \cdot \cdot \cdot (2)$$

$$m_3 \ddot{x}_3 + c_1 (\dot{x}_3 - \dot{x}_1) + c_3 (\dot{x}_3 - \dot{x}_2) + k_1 (x_3 - x_1) + k_3 (x_3 - x_2) = 0 \quad \cdot \cdot \cdot (3)$$

$$f_1 = \frac{1}{2\pi} \sqrt{\frac{k_1}{m_1}} \quad (4)$$

$$f_2 = \frac{1}{2\pi} \sqrt{\frac{k_1 + 2k_2}{m_1}} \quad (5)$$

[0032] Frequencies f_1 and f_2 thus obtained as two solutions are each a resonance frequency and, therefore, in an oscillation mode of the resonance frequency f_1 of the primary side (lower order side) of Equation (4) the moving part and the amplitude oscillation spindle 9 move in a same phase and in an oscillation mode of the resonance frequency f_2 of the secondary side (higher order side) of Equation (5) the moving part and the amplitude control spindle 9 move in phases opposite to each other; so that when the moving part is reciprocated axially by flowing through the coil 5 a current having a frequency in the vicinity of this secondary side resonance frequency f_2 , the amplitude control spindle 9 moving in the opposite phase cancels inertia force of the moving part, which in turn cancels an inertia force of the amplitude control spindle 9. In this state, further, the two mass points of the moving part and the amplitude control spindle 9 would move so as to balance their respective inertia forces to thereby give a great effects of canceling the inertia forces by means of the counteraction, thus minimizing the force transmitted from these two mass points (the moving part and the amplitude control spindle 9) to the fixed part side hence the amplitude of the linear oscillator.

[0033] As may be obvious from the above equation (5), to keep the secondary side resonance frequency f_2 at a constant value, it is necessary to set the spring coefficient k_2 of the spring 61 at a large value and the spring coefficients k_1 and k_3 of the springs 60 and 62 at small values. If the spring coefficients k_1 and k_3 of the springs 60 and 62 respectively are thus set smaller, the amplitude control spindle 9 receives a less force from the fixed part, resulting in a larger stroke of the moving part.

[0034] Also, the mass of the amplitude control spindle 9 should preferably be larger than that of the moving part. This is because, when they move in the vicinity of the secondary side resonance frequency f_2 , the two mass points of the moving part and the amplitude control spindle 9 would move so as to balance their inertia forces, so that the moving part having smaller mass obtains a larger oscillation amplitude than the amplitude control spindle 9 having larger mass, thus making it possible to increase the stroke of the moving part. If they move at the lower order side resonance frequency, on the other hand, the amplitude control spindle and the moving part move in the same direction, thus making it possible to increase the amplitude of the moving part. Also, if it is possible to move them at alternating frequencies of the lower order and higher order sides, a stroke increase and an amplitude increase can be switched according to the application.

[0035] FIG. 3 shows another embodiment. In this embodiment, the springs 60, 61, and 62 are all made of a leaf spring. In this case, the mass of the amplitude control spindle 9 should preferably be made smaller than that of the moving part. By thus employing a leaf spring, not only the mass of the spring as a standalone element can be made lighter easily but also its whole length can be decreased easily, besides which the mass of the amplitude control spindle 9 can be made smaller than that of the moving part, thus realizing a linear oscillator light-weighted as a whole with an extremely small amplitude.

[0036] FIG. 4 is further embodiment according to Claim 7, in which as the connection element the output-take-out shaft 7 is provided not to the plunger 1 but to the amplitude control spindle 9. In this case also, almost the same motions can be obtained as those of the above-mentioned linear oscillator and, besides, it is possible to dispose opposite to that shown in FIG. 1 the position of the magnetic circuit portion including such as the permanent magnet 5, which is usually supposed to have a large mass, thus enhancing the gravity position in height of the equipment as a whole and the freedom degree in product designing of, e.g., a distance with respect to the power supply. Also, the light-weighting of the amplitude control spindle 9 directly leads to the increasing of the linear oscillator stroke, so that these two merits can be united easily and, further, a member to be attached to the output-take-out shaft 7 can be designed as part of a mass component of the amplitude control spindle 9, to decrease the initial mass of the amplitude control spindle 9 by that much, thus obtaining a more light-weighted and less vibrated linear oscillator.

[0037] FIG. 5 shows a still further embodiment according to Claim 12, in which the thickness of the shield case 10 formed of a magnetic substance is 7% or more of that of an outer diameter of the permanent magnets 40 and 41 and there is formed an air gap between the inner surface of the shield case 10 and the outer surface of the permanent magnets 40 and 41 and also the yokes 20, 21, 30, and 31 to thereby give a sufficient shielding effect, thus obtaining a linear oscillator having no influence on a pace maker etc. In such a case, the shielding effect is improved when at least a portion of a case such as the shield case 10 which faces the electromagnetic part is formed of a magnetic substance and has a thickness of 7% or more of the outer diameter of the permanent magnet.

[0038] FIG. 6 shows an additional embodiment according to Claims 13 and 14, in which the yokes 20 and 21 have a triangular cross section so that their surfaces facing the shield case 10 may be a slope. The yokes 20 and 21 and the shield case 10 can be separated from each other to thereby decrease the quantity of magnetic flux running toward the shield case 10, thus improving the driving thrust of the plunger 1, which is the moving part.

[0039] As shown in FIG. 7, almost the same effects as above can be obtained even when the outer diameter of the yokes 20 and 21 is made smaller than that of the permanent magnet 5 to thereby give a space with respect to the

shield case 10. In this case, as shown in FIG. 8, the yokes 20 and 21 can be provided with a thin layer made of a magnetic substance covering the permanent magnet 5 entirely to thereby suppress the demagnetizing effect of the permanent magnets 40 and 41.

[0040] Besides, as shown in FIG. 9, the permanent magnets 40 and 41 can be formed frusto-conical to thereby increase the quantity of magnetic flux running toward the movable plunger 1, which contributes to the thrust.

[0041] FIG. 10 shows an additional embodiment according to Claim 15, in which the shaft 7 passing through the movable plunger 1 is made of a nonmagnetic substance. This leads to an improvement in the thrust and also prevents the leakage of magnetic flux through the shaft 7.

[0042] FIG. 11 shows an additional embodiment according to Claims 15 and 16, in which a portion of the shaft 7 which passes through the movable plunger 1 is made of a nonmagnetic substance. A portion of the plunger 1 which is exposed to the outside is made of a highly wear resistant metal material and a portion which is pressed into the plunger 1 is made of a nonmagnetic substance to thereby enable improving the thrust without deteriorating the wear resistance.

[0043] FIG. 12 shows an additional embodiment according to Claim 17, in which the yokes 20, 21, 30, and 31 are formed into a stack structure made of a thin sheet to thereby decrease an eddy current loss. The eddy current loss can thus be reduced and its effects increase with the increasing operating frequency. Almost the same effects can be obtained by forming the movable plunger 1 into a stacked structure. Such a structure can be formed also by blanking the material to thereby reduce the manufacturing costs.

[0044] FIG. 13 shows an additional embodiment according to Claim 18, in which to reduce the eddy current loss, the movable plunger 1 has a plurality of slits 11 formed therein in the amplitude direction. Those slits 11 can greatly decrease the magnitude of an eddy current when it flows in the axial direction of the plunger 1, which is the main direction in which the magnetic flux runs. In this case also, the plunger 1 can be formed into a stacked structure made of a magnetic substance to thereby mitigate the difficulty in processing and increase the demagnetizing effect due to the iron loss.

[0045] FIG. 14 shows an additional embodiment according to Claim 19, in which when the plunger 1 (moving part) having a large diameter portion at both ends, in its reciprocating direction, and a small diameter portion at its center is present at a neutral position, the boundary between the large diameter and small diameter portions roughly agrees with the end face of the yoke 30 and 31 on the side of the coil 5 and both axial end faces of the plunger 1 roughly agree with the end faces of the permanent magnets 40 and 41 on the sides of the yokes 20 and 21 respectively. A detent force roughly at the neutral position can be reduced to almost zero and so can be ignored in the designing of a relevant resonance system taking into account only the spring coefficient of the spring member, thus facilitating the designing.

[0046] FIGS. 15 and 16 show an additional embodiment according to Claim 20, in which the air gap between the outer peripheral surface of the movable plunger 1 and the inner peripheral surface of the yokes 20 and 21 is made non-uniform in a revolution direction. FIG. 16A shows a positional relationship between the plunger and the yoke in a cross-sectional view taken along a line A of FIG. 15, FIG. 16B shows that in a cross-sectional view taken along a line B of FIG. 15, and FIG. 16C shows that in a cross-sectional view taken along a line C of FIG. 15. Since the gap between the plunger 1 and the yokes 20 and 21 changes in revolution direction with changing stroke positions, the plunger 1 can have a revolution directional force with axial movements thereof, thus obtaining a rectilinear motion as well as a revolutionary motion simultaneously.

[0047] FIG. 17 shows an additional embodiment according to Claim 9, in which the shield case 10 has on its inner surface a guide (rocking preventing means) 15 for preventing the amplitude control spindle 9 from rocking. In this embodiment the spring member is formed of a coil spring and so the amplitude control spindle 9 may not carry out an ideal rectilinear motion because of a problem of a stress balance and may rock, in which case the amplitude control effect such as vibration absorption cannot sufficiently be obtained, which rocking of the amplitude control spindle 9 can be prevented by the guide 15 to thereby permit the amplitude control spindle 9 to move ideally.

[0048] As shown in FIG. 18, the rocking of the amplitude control spindle 9 can be prevented also by providing the two or more spring 62 disposed between the amplitude control spindle 9 and the shield case 10.

[0049] Also, as shown in FIG. 19, the rocking may be prevented by providing sliding bearings 80 and 81 facing the shaft 7 in the amplitude control spindle 9. A leaf spring, if used to form the spring member, would absorb the rocking, so that as shown in FIG. 20, the springs 61, 62 of the spring member which have one end thereof fixed to the amplitude control spindle 9 may be formed of the leaf spring to effectively prevent the rocking.

[0050] FIG. 21 shows an additional embodiment according to Claim 21, in which a groove 70 formed in the shaft 7 is engaged with a protrusion provided on the shield case 10 to thereby restrict the axial revolution of the shaft 7 and the plunger 1 around that shaft (to provide a revolution restricting means). This mechanism can suppress unnecessary axial revolutions.

[0051] FIG. 22 shows an additional embodiment according to Claim 22, in which one end of the spring 60 formed of a coil spring is fixed to the shield case 10 and the other end thereof, to the plunger 1. In this case, the spring 60 formed of a coil spring not only exerts a spring force in the axial direction of the plunger 1 but also provides the plunger 1 with

a small-angle reciprocating revolution in the axial direction with axial compression and expansion. In this case, the spring 60 has a spring force also in the revolution direction, thus being able to give also a secured revolutionary motion by matching a revolutionary directional resonance frequency.

[0052] As described above, according to the invention claimed here, it is possible to directly convert electric energy into a rectilinear reciprocating motion of the plunger without a motion converting mechanism for converting a revolutionary motion into a rectilinear motion and also cancel an unnecessary vibration using the amplitude control spindle in order to obtain a miniaturized linear oscillator with low noise and extremely low vibration, which is well suited for use as a driving part for mechanical control use or a driving part of an electric razor or a power tooth brush.

[0053] According to Claim 8, besides the above-mentioned effects of the invention, it is possible to increase the stroke of the moving part.

[0054] According to Claim 9, besides the above-mentioned effects of the invention, it is possible to suppress the rocking of the amplitude control spindle to thereby permit the amplitude control spindle to carry out in an ideal rectilinear motion, thus obtaining a sufficient vibration reducing effect.

[0055] According to Claim 10, besides the above-mentioned effects of the invention, it is possible to increase a stroke of the moving part.

[0056] According to Claim 11, besides the above-mentioned effects of the invention, it is possible to obtain a lightweighted and easy-to-use linear oscillator.

[0057] According to Claim 12, besides the above-mentioned effects of the invention, it is possible to obtain such a linear oscillator that has an improved magnetizing effect and has a magnetic leakage level low enough to have no influence on a pace maker etc.

[0058] According to Claim 13, besides the above-mentioned effects of the invention, it is possible to improve the thrust.

[0059] According to Claim 14, besides the above-mentioned effects of the invention, it is possible to further improve the thrust.

[0060] According to Claim 15, besides the above-mentioned effects of the invention, it is possible to improve the thrust and prevent magnetic flux leakage.

[0061] According to Claim 16, besides the effects of Claim 15 above, it is possible to improve the thrust without deteriorating a wear resistance.

[0062] According to Claim 17, besides the above-mentioned effects of the invention, it is possible to decrease an eddy current loss.

[0063] According to Claim 18, besides the effects of Claim 17 above, it is possible to greatly decrease an eddy current using slits when magnetic flux runs in a direction in which the moving part moves.

[0064] According to Claim 19, besides the above-mentioned effects of the invention, it is possible to reduce a detent force almost to zero at the neutral position to thereby facilitate, e.g. designing of a resonance system.

[0065] According to Claim 20, besides the above-mentioned effects of the invention, it is possible to generate a revolutionary directional force according to a stroke position to thereby carry out a rectilinear motion and a revolutionary motion simultaneously.

[0066] According to Claim 21, besides the above-mentioned effects of the invention, it is possible to restrict the revolution of the shaft to thereby suppress unnecessary revolution of the shaft.

[0067] According to Claim 22, besides the effects of Claim 21 above, it is possible to restrict revolution without any other member.

Claims

1. A linear oscillator comprising:

a moving part reciprocating;
a case containing incorporating said moving part; and
an amplitude control spindle supported in said case to be movable,

wherein said moving part and said amplitude control spindle reciprocate at a resonance frequency of said linear oscillator or a frequency in a vicinity thereof.

2. The linear oscillator according to Claim 1, comprising:

an electromagnetic driving part housed in said case, for reciprocating said moving part; and
a spring member disposed at least between said case and said moving part, and between said case and said

amplitude control spindle, for forming a spring oscillation system,

wherein a resonance frequency of said spring oscillation system is equal to a resonance frequency of said linear oscillator or a frequency in a vicinity thereof.

- 5 3. The linear oscillator according to Claim 1, wherein said moving part and said amplitude control spindle reciprocate at a resonance frequency moving in respective phases opposite to each other and.
- 10 4. The linear oscillator according to Claim 2, in which said spring member includes:
a first spring disposed between a fixed part comprised of said case and said electromagnetic driving part and said moving part;
a second spring disposed between said moving part and said amplitude control spindle; and
a third spring disposed between said amplitude control spindle and said fixed part.
- 15 5. The linear oscillator according to Claim 2, wherein said electromagnetic driving part includes a coil to thereby use a coil current, thus enabling controlling a reciprocating motion.
- 20 6. The linear oscillator according to Claim 5, wherein said electromagnetic driving part includes:
a coil surrounding an outer periphery of said moving part;
second yokes each disposed at each of both ends of said coil;
a pair of permanent magnets which are each disposed on an end face of each of said second yokes and which are magnetized symmetrically with respect to a center of said coil; and
25 first yokes provided on sides of said permanent magnets opposite to said second yokes respectively.
7. The linear oscillator according to Claim 1, wherein a shaft for taking out an motion output is connected as a connection element to said moving part or said amplitude control spindle.
- 30 8. The linear oscillator according to Claim 4, wherein said second spring is stronger in spring force than said first and third springs.
9. The linear oscillator according to Claim 1, wherein said amplitude control spindle is provided with rocking preventing means for preventing rocking.
- 35 10. The linear oscillator according to Claim 2, wherein:
said spring member is formed of a coil spring; and
mass of said amplitude control spindle and a connection element thereof is larger than mass of said moving part and a connection element thereof.
- 40 11. The linear oscillator according to Claim 2, wherein:
said spring member is formed of a leaf spring; and
mass of said amplitude control spindle and a connection element thereof is smaller than mass of said moving part and an element thereof.
- 45 12. The linear oscillator according to Claim 6, wherein at least a portion of said case facing said electromagnetic driving part is made of a magnetic substance and a thickness of a magnetic substance facing said electromagnetic driving part is 7% or more of an outer diameter of said permanent magnets.
- 50 13. The linear oscillator according to Claim 6, wherein magnetic flux increasing means is provided for increasing a quantity of magnetic flux running toward said moving part.
- 55 14. The linear oscillator according to Claim 6, wherein said first yokes each have a triangular cross section having a side facing said case being a slope.
15. The linear oscillator according to Claim 7, wherein said shaft is partially or entirely made of a nonmagnetic sub-

stance.

16. The linear oscillator according to Claim 15, wherein only a piercing portion of said moving part passing through said shaft is made of a nonmagnetic substance.

17. The linear oscillator according to Claim 6, wherein said yokes or said moving part are provided with eddy current loss reducing means for reducing an eddy current loss.

18. The linear oscillator according to Claim 17, wherein said moving part has a slit formed therein in an amplitude direction.

19. The linear oscillator according to Claim 6, wherein said moving part has a large diameter portion at both ends thereof in a reciprocating direction thereof and a small diameter portion at a center thereof in such a configuration that a boundary between said large diameter portion and said small diameter portion may roughly agrees with an end face of said second yoke on a side of said coil and that both end faces of said moving part in a reciprocating direction roughly agree with end faces of said permanent magnets on sides of said first yokes.

20. The linear oscillator according to Claim 6, wherein a gap between an outer peripheral surface of said moving part and an inner peripheral surface of said yokes is non-uniform in an revolutionary direction.

21. The linear oscillator according to Claim 7, wherein revolution restricting means is provided for restricting axial revolution of said shaft.

22. The linear oscillator according to Claim 21, wherein said spring member operates as said revolution restricting means.

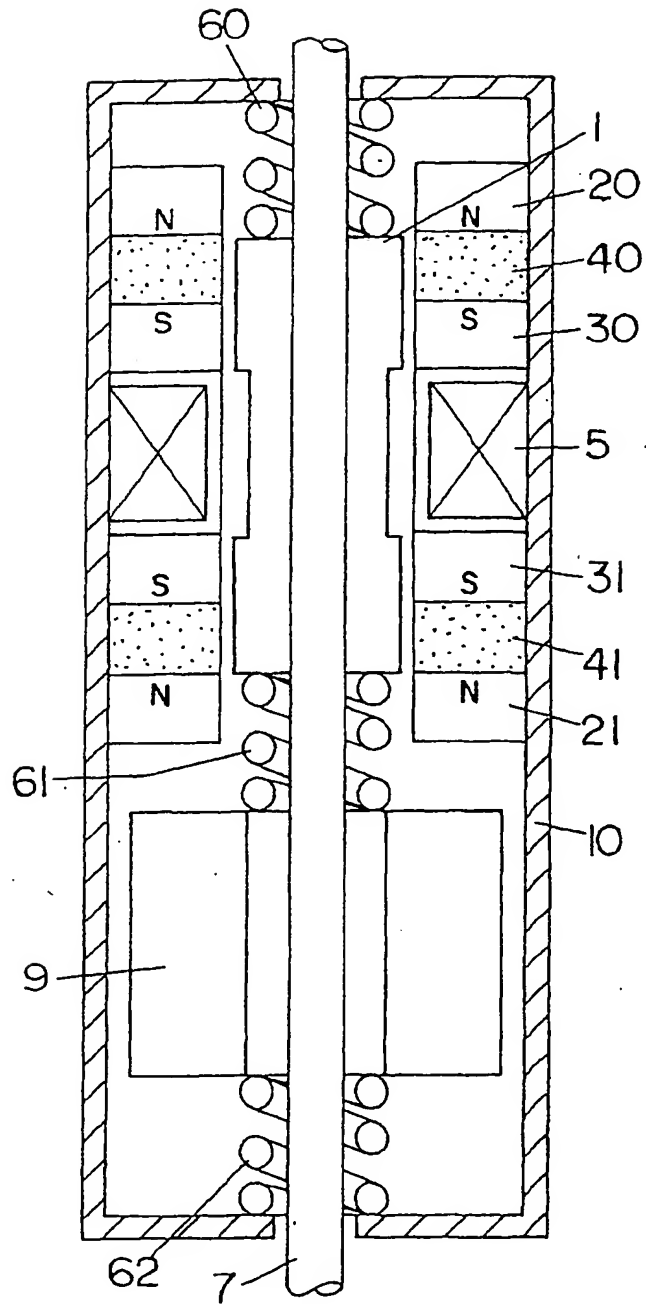


Fig. 1

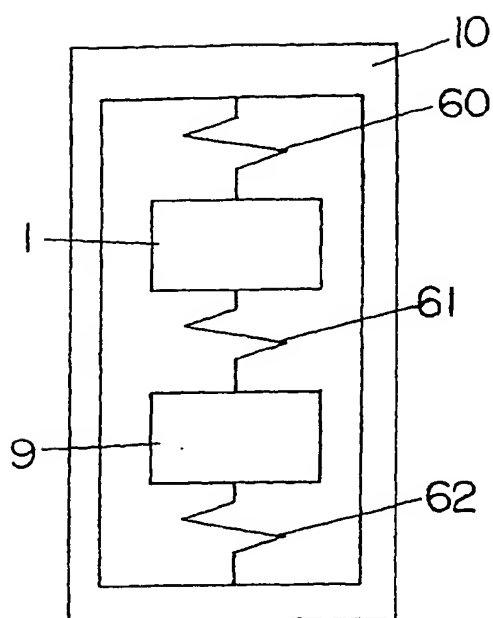


Fig. 2

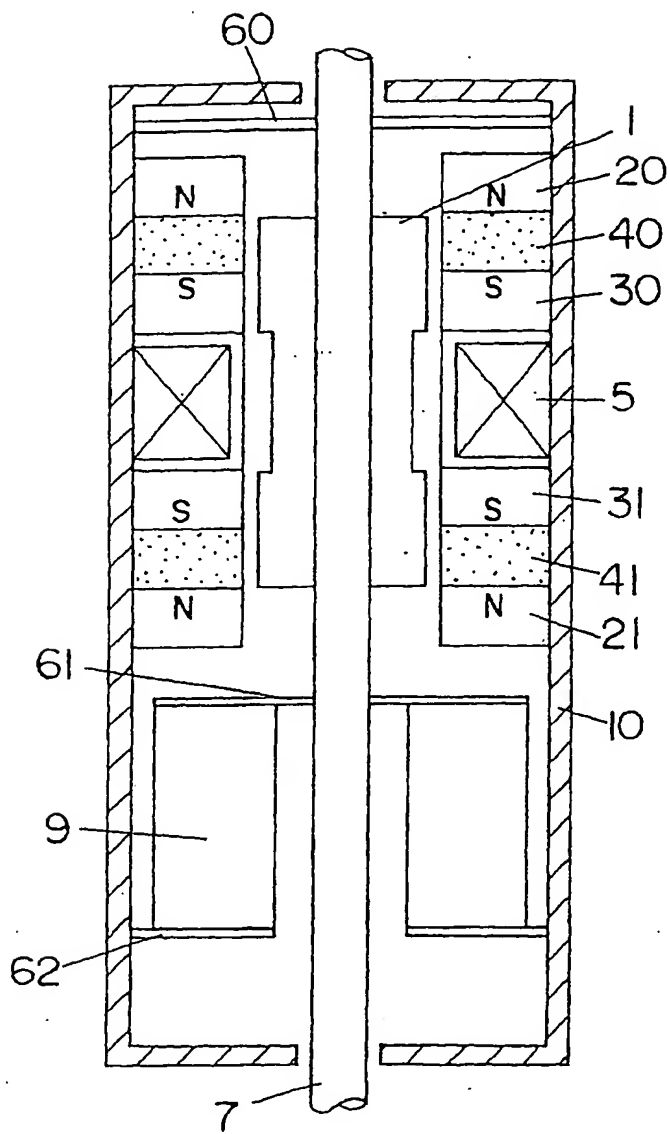


Fig. 3

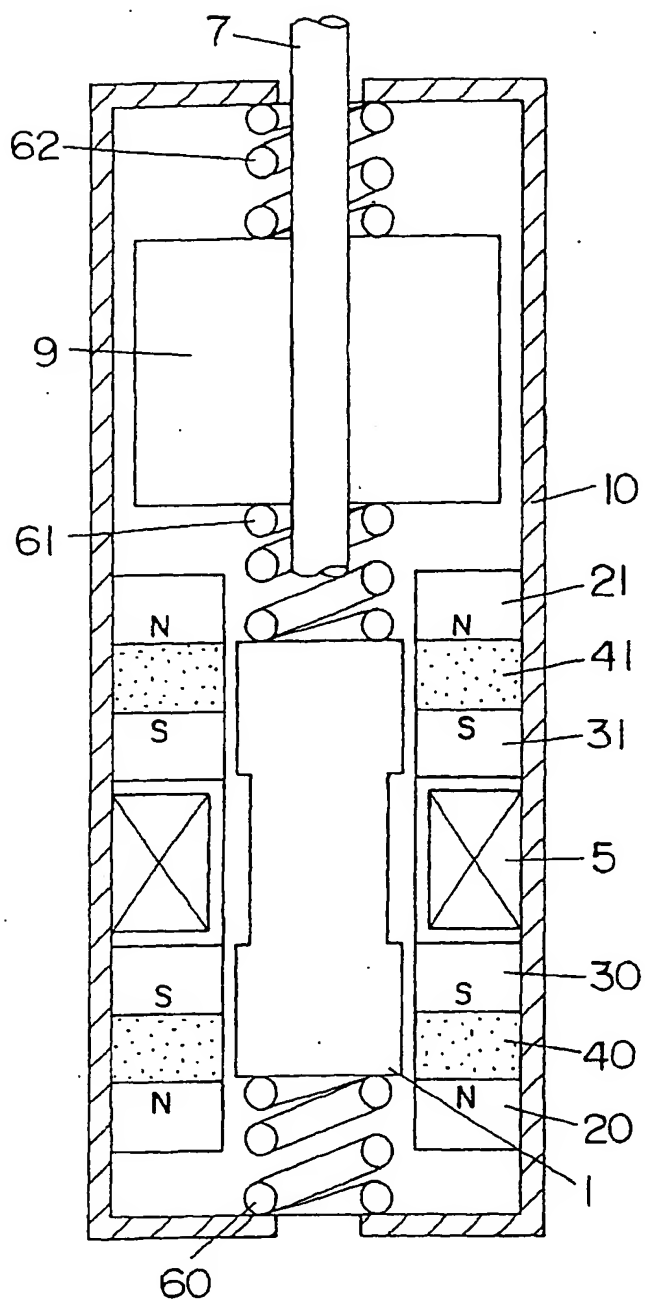


Fig. 4

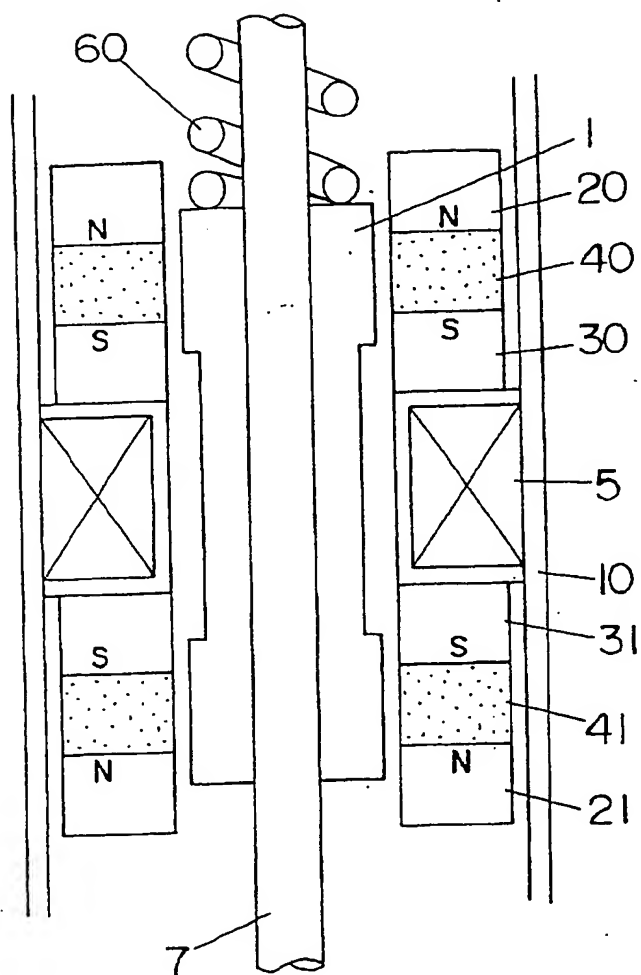


Fig. 5

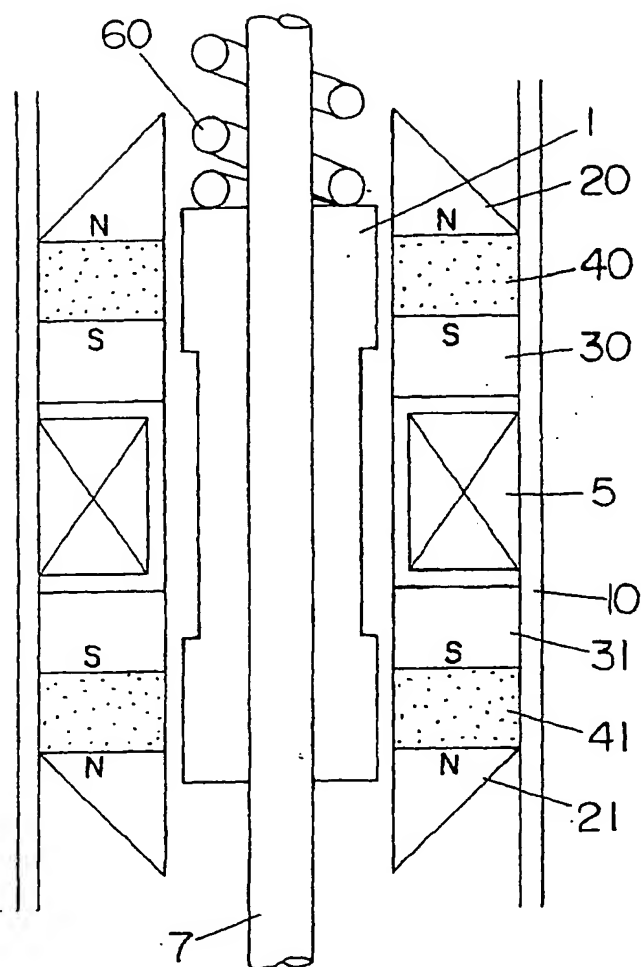


Fig. 6

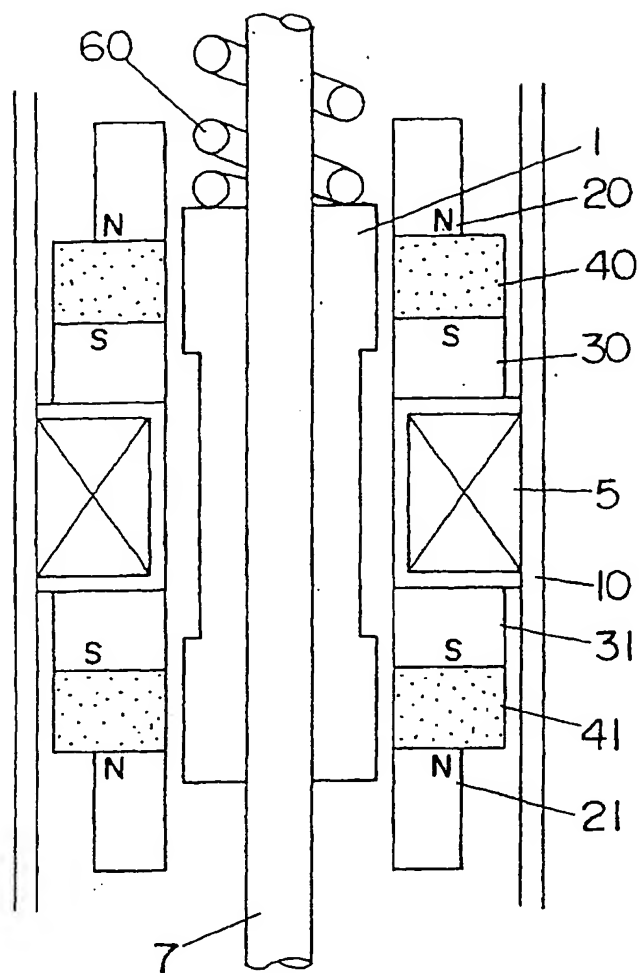


Fig. 7

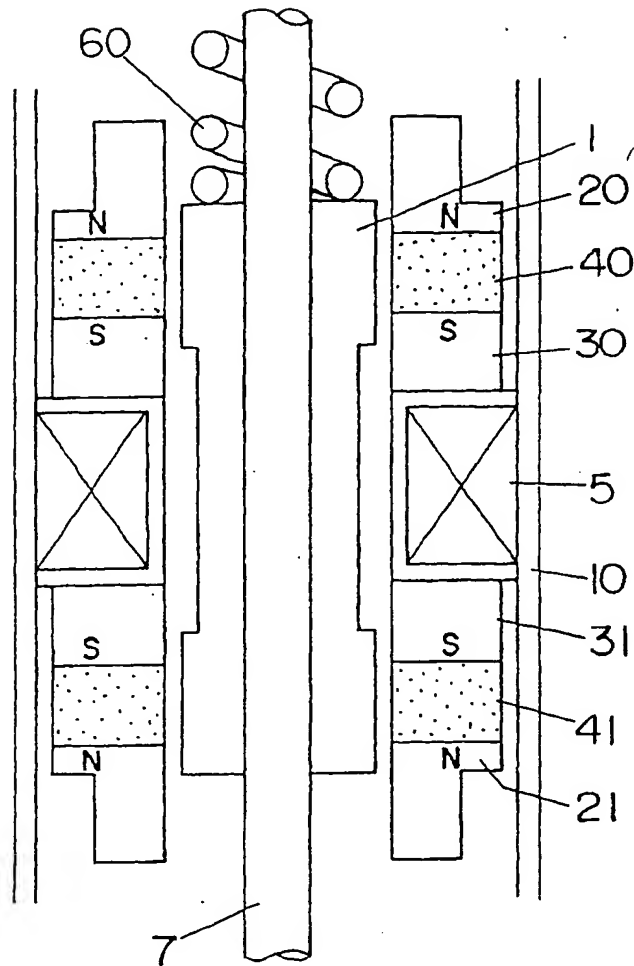


Fig. 8

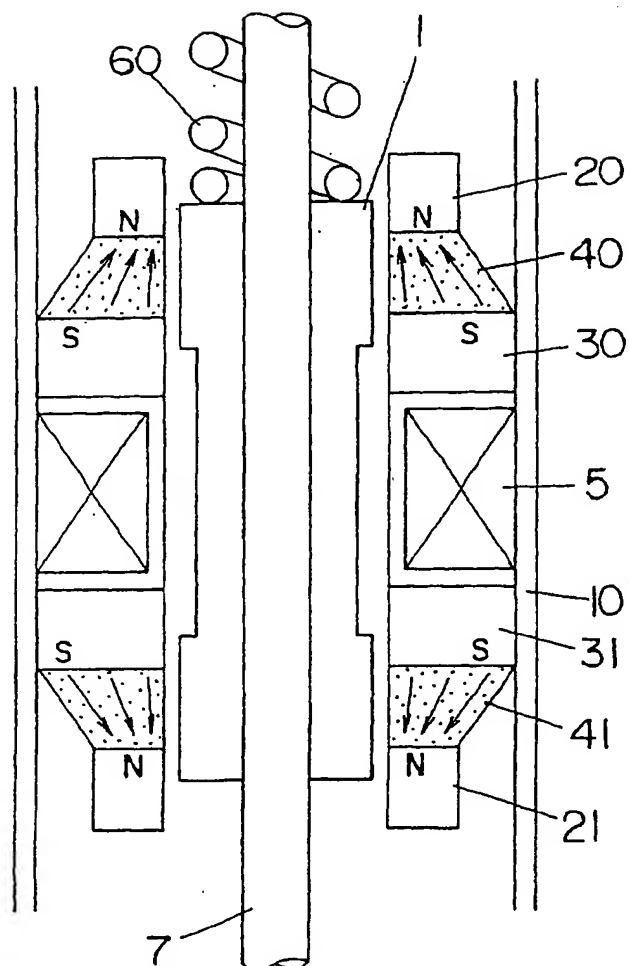


Fig. 9

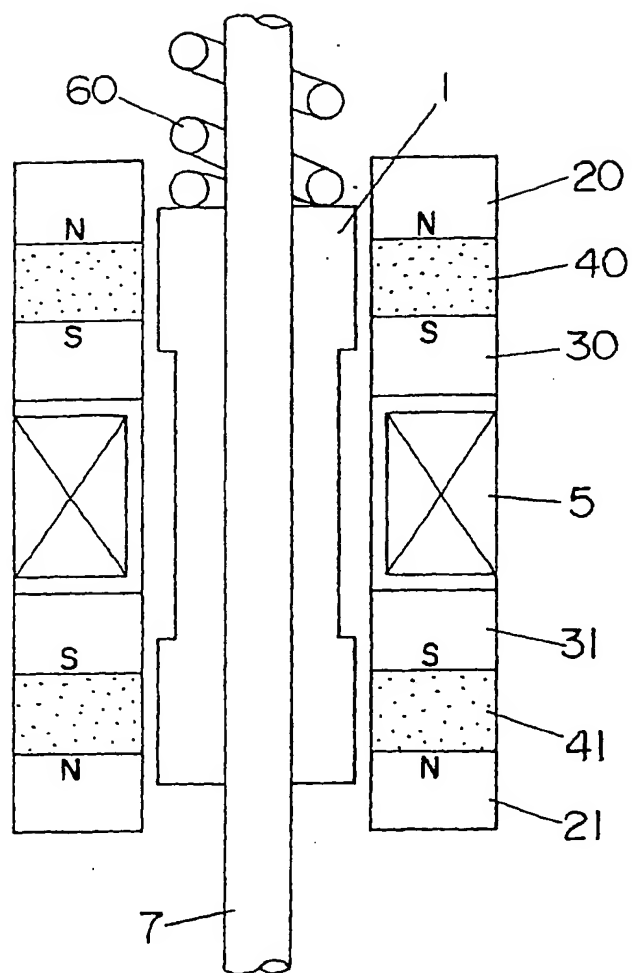


Fig. 10

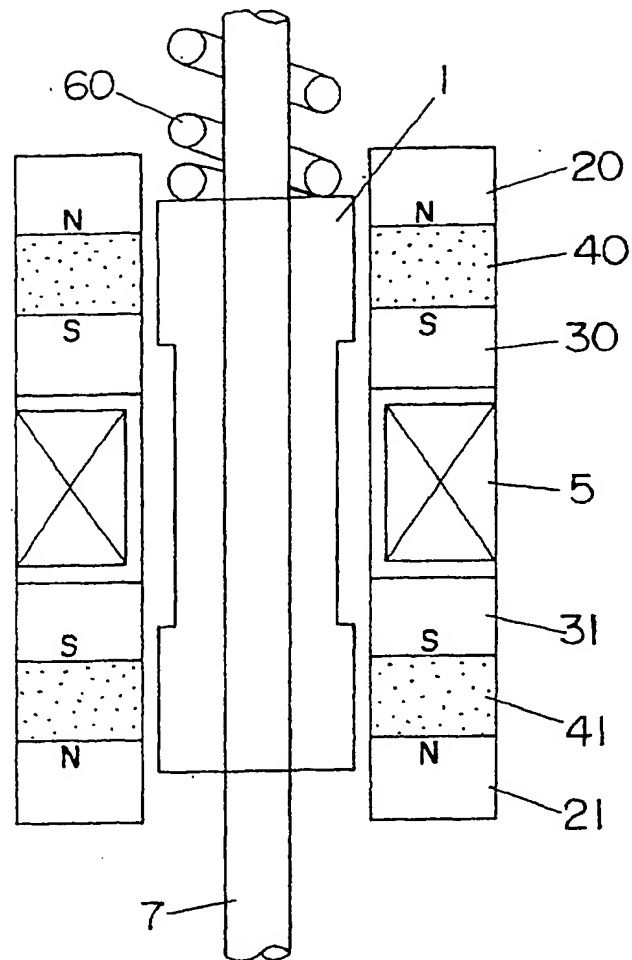


Fig. 11

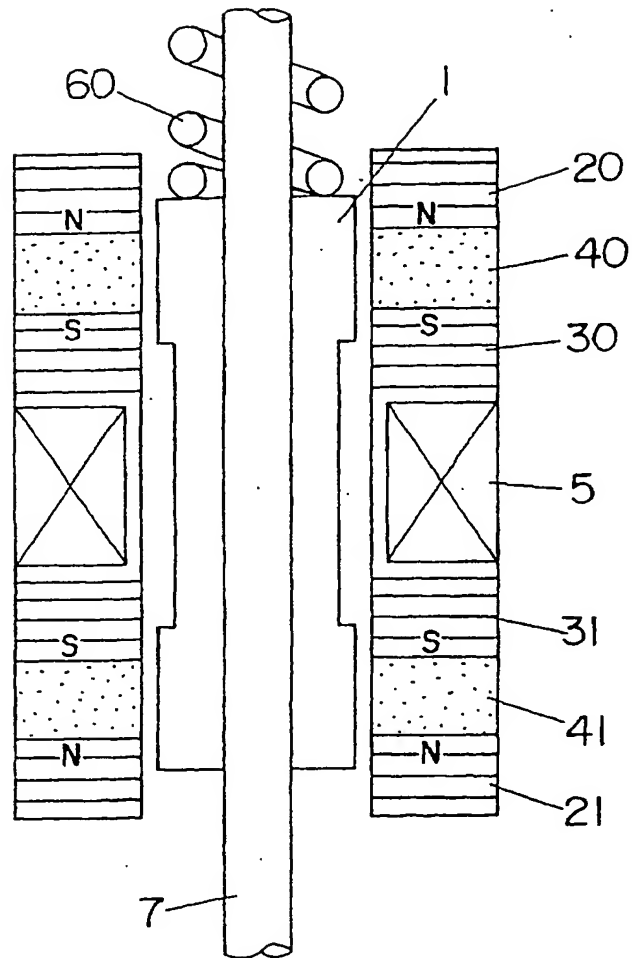


Fig. 12

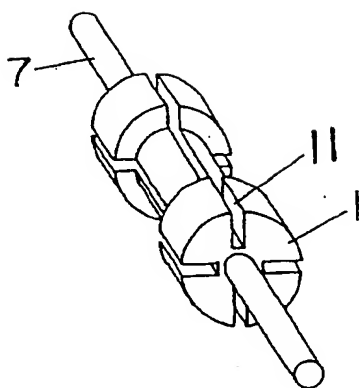


Fig. 13

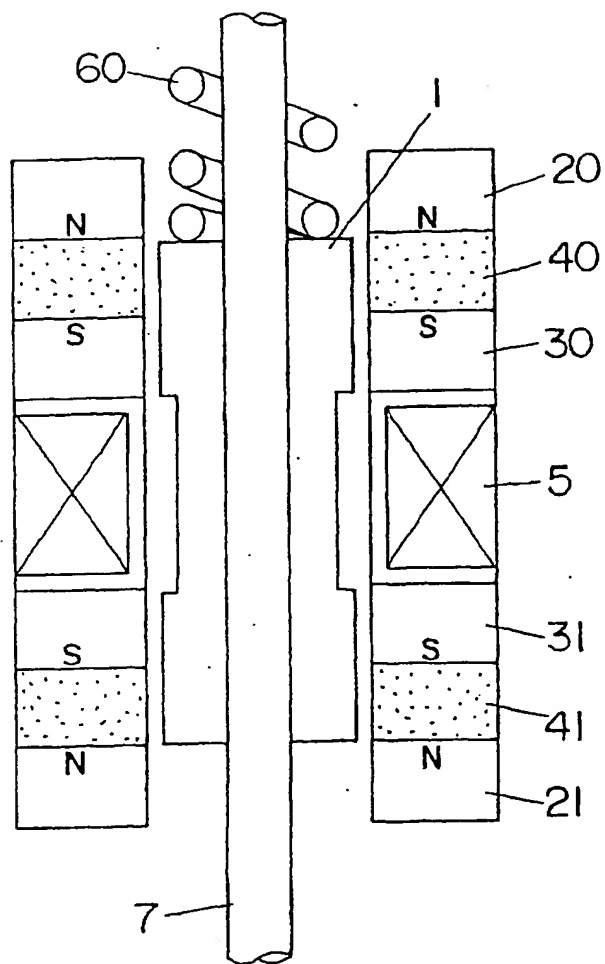


Fig. 14.

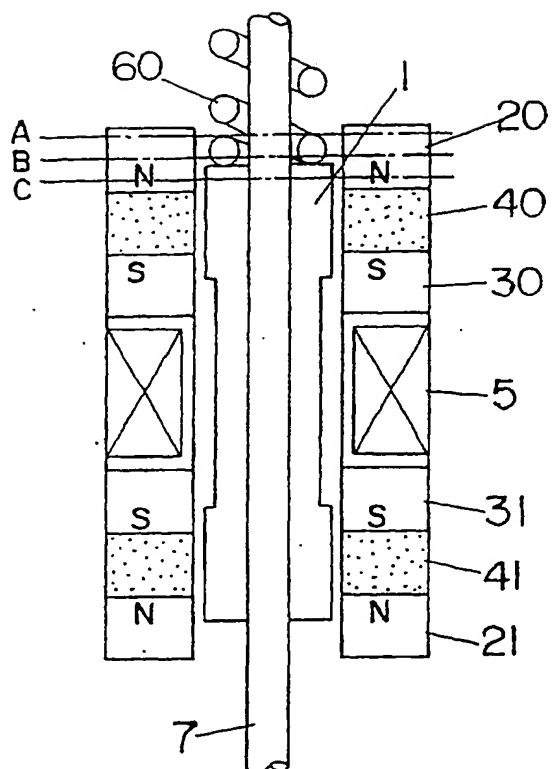


Fig. 15

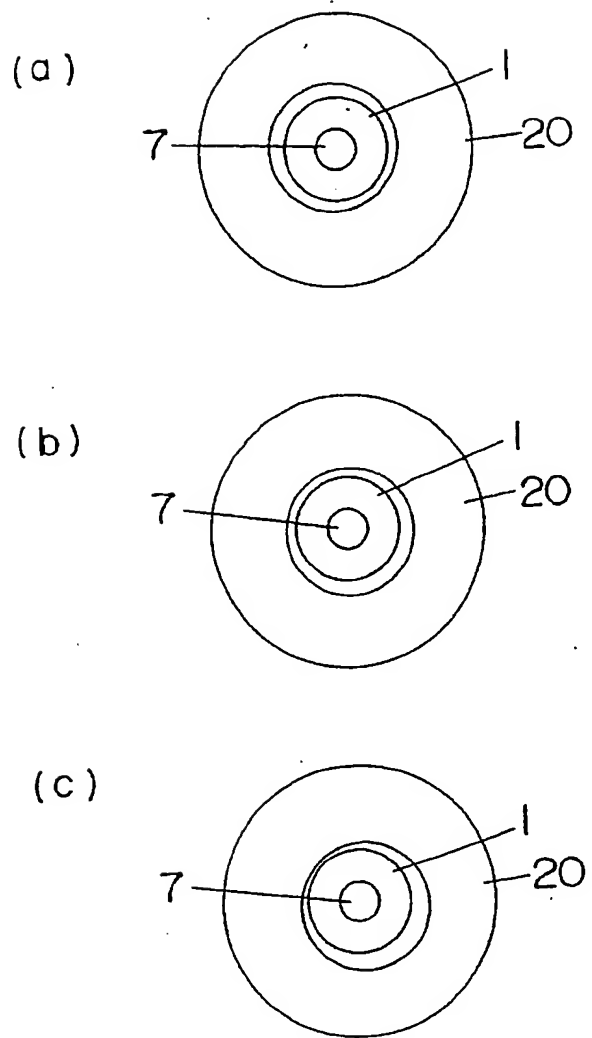


Fig. 16

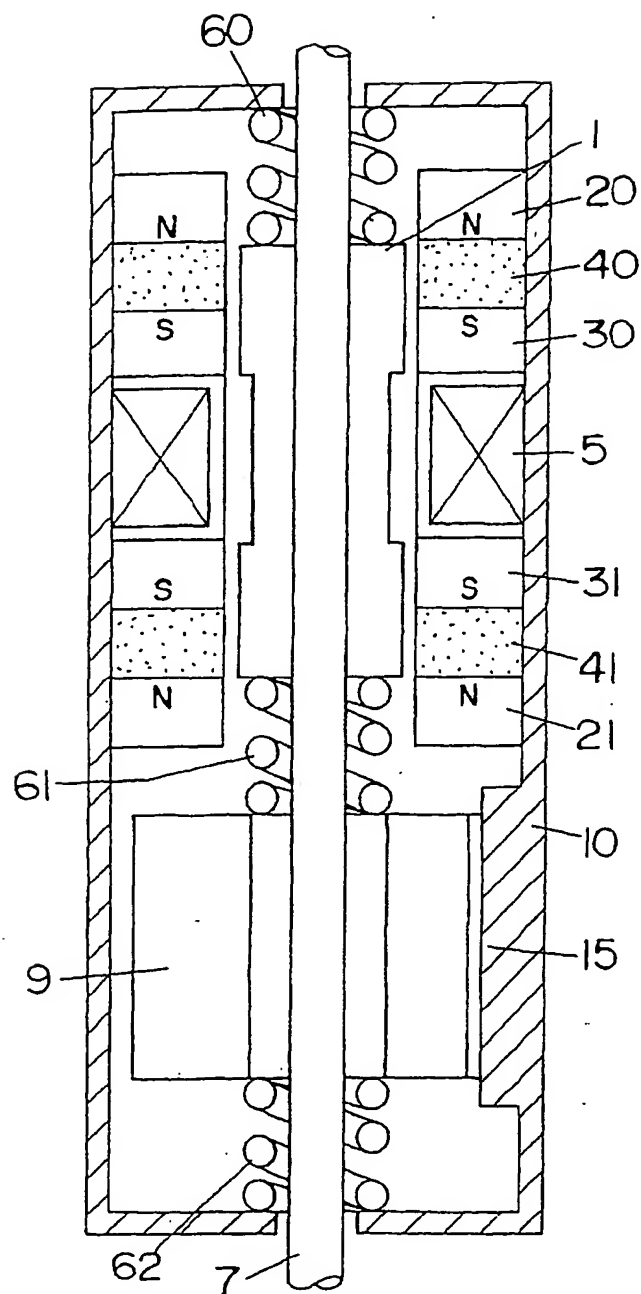


Fig. 17

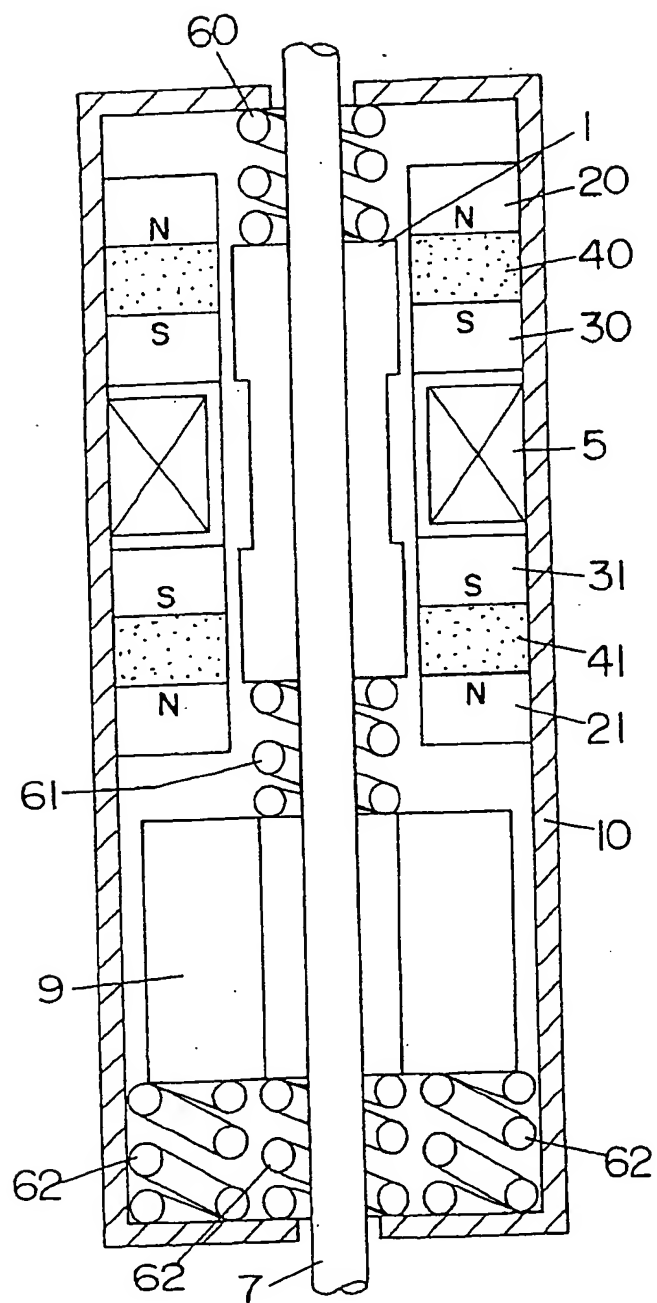


Fig. 18

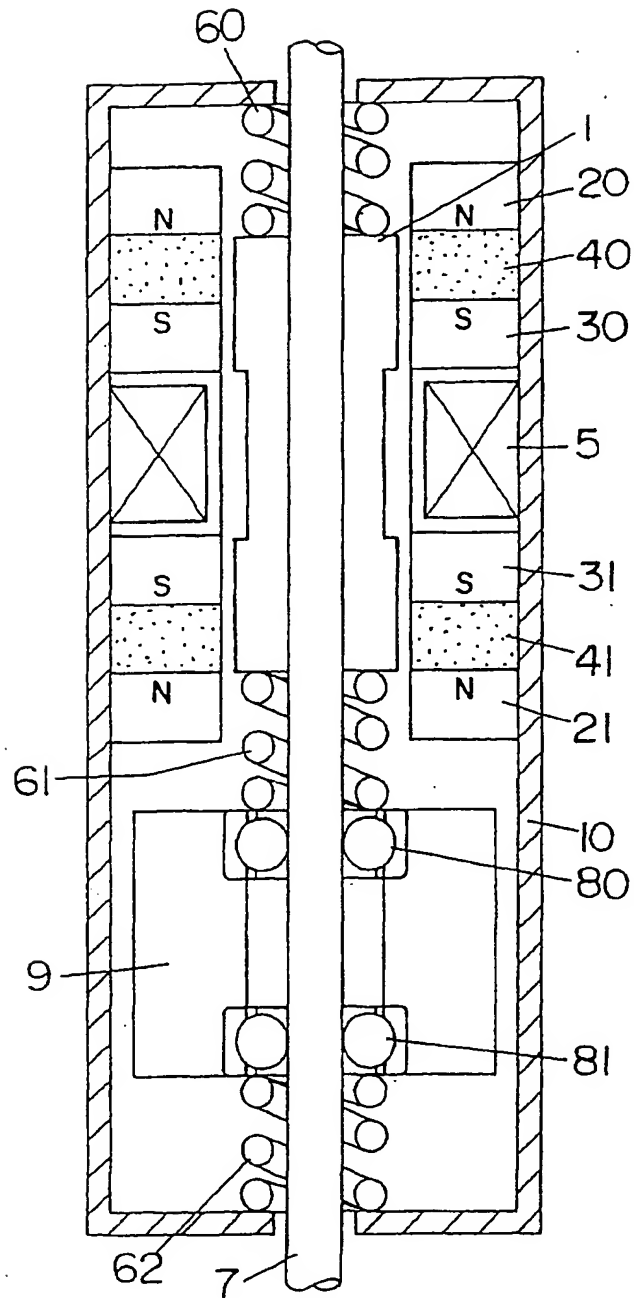


Fig. 19

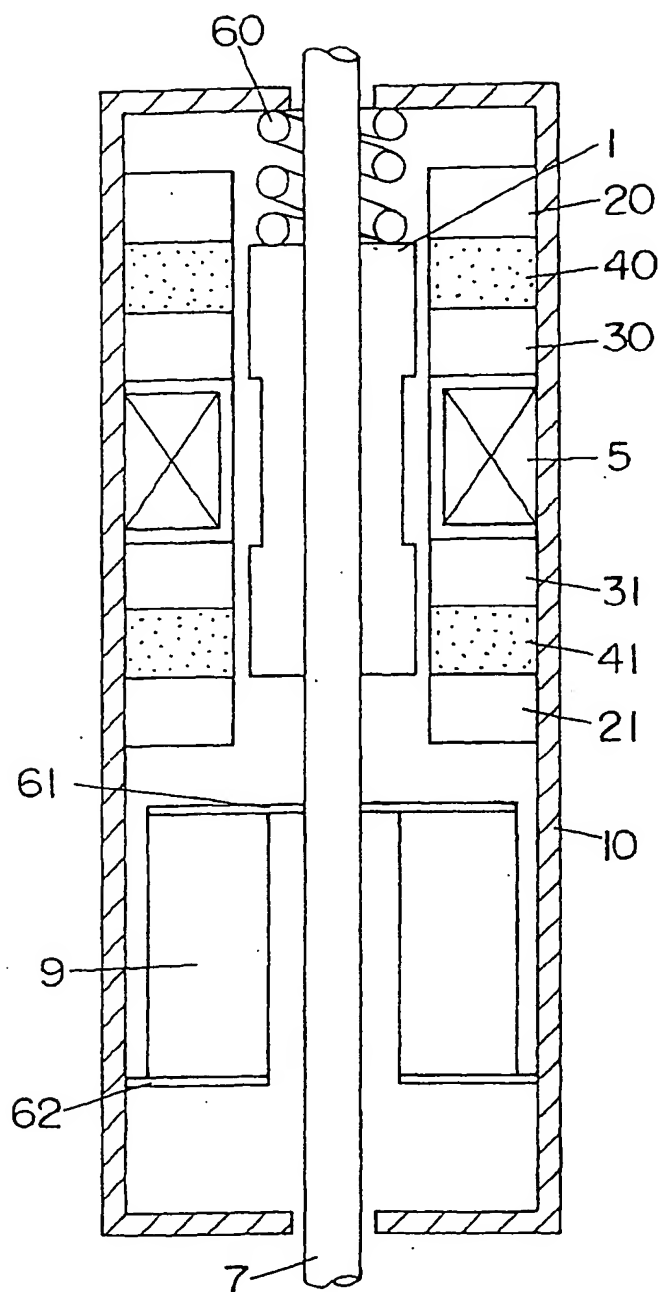


Fig. 20

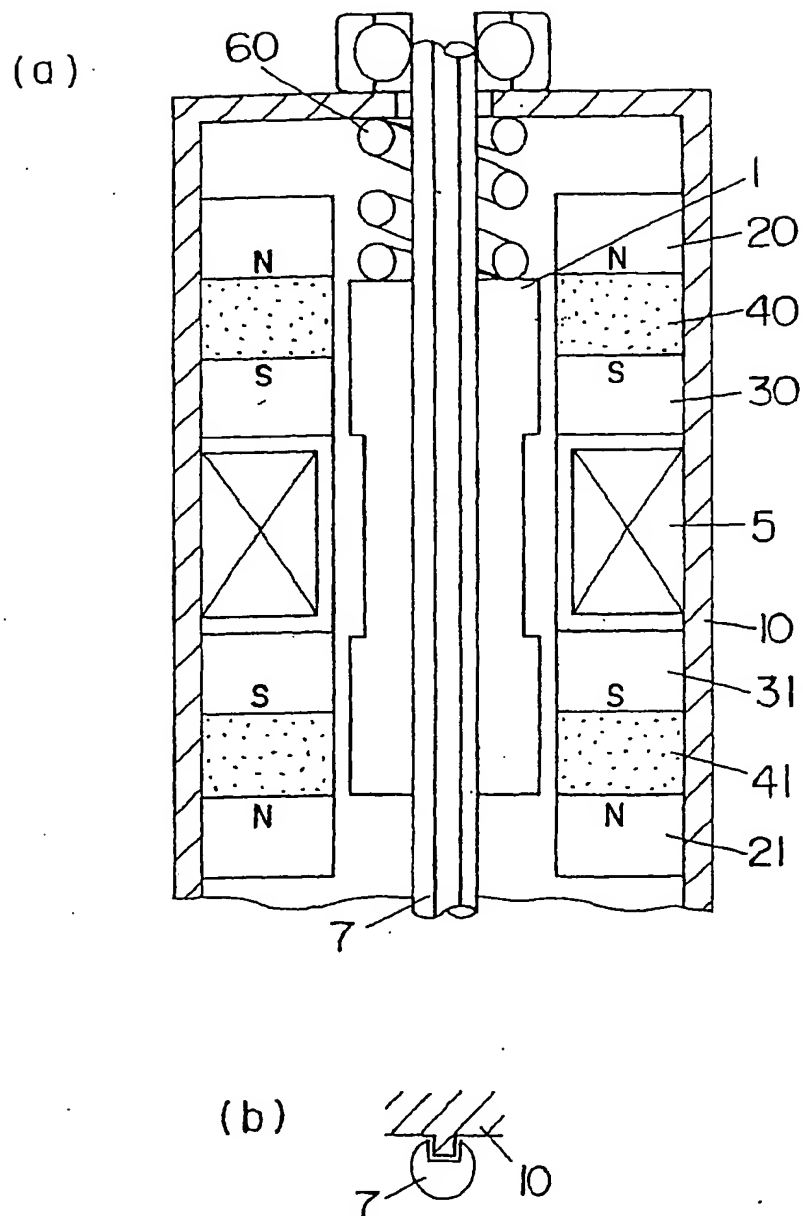


Fig. 21

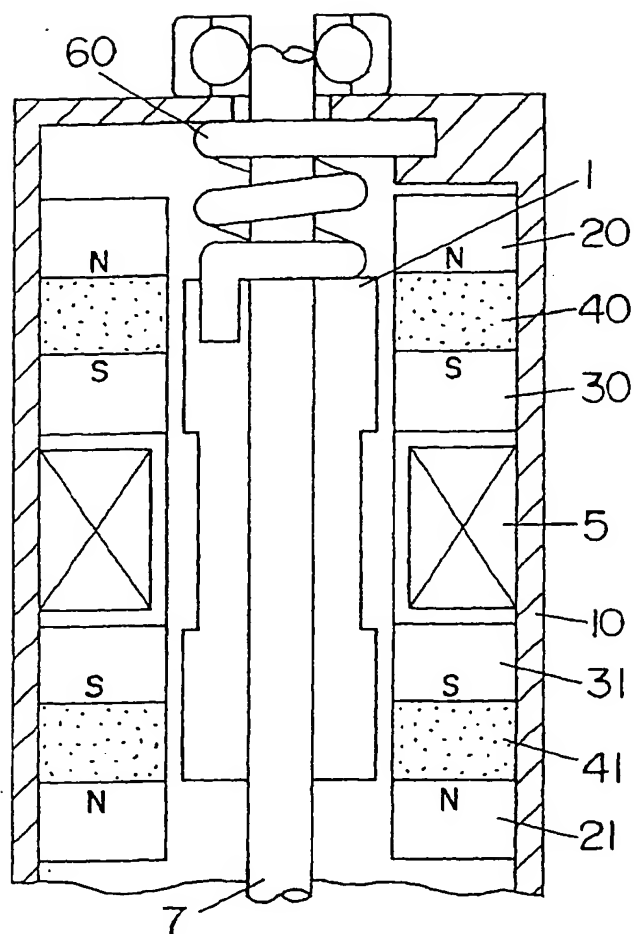


Fig. 22



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 25 0228

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	PATENT ABSTRACTS OF JAPAN vol. 017, no. 193 (E-1351), 15 April 1993 (1993-04-15) & JP 04 340356 A (SAGINOMIYA SEISAKUSHO INC), 26 November 1992 (1992-11-26)	1-5,7	H02K33/16
A	* abstract *	6,8-22	
Y	WO 94 00906 A (HARMAN INT IND) 6 January 1994 (1994-01-06)	1-5,7	
A	* page 4, line 16 - page 6, line 15; figure 1 *	6,8-22	
A	FR 67 893 E (GENESLAY RAYMOND) 25 March 1958 (1958-03-25) * page 2, left-hand column, line 31 - right-hand column, line 15; figure 1 *	1-22	
A	US 3 878 412 A (KURPANEK WALDEMAR HELMUT) 15 April 1975 (1975-04-15) * abstract; figures 1-4 *	1-22	
A	US 4 002 935 A (BRAUER JOHN ROBERT) 11 January 1977 (1977-01-11) * column 5, line 37 - column 768; figure 1 *	1-22	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H02K
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 09, 13 October 2000 (2000-10-13) & JP 2000 166209 A (MASUDA KENJI), 16 June 2000 (2000-06-16) * abstract *	1-22	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 January 2002	Examiner Tangocci, A
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons X : part of the same patent family, corresponding document Y : part of the same patent family, corresponding document A : technological background O : non-written disclosure I : intermediate document	

EP 0 FORM 1243 (3.12.92) (P4/C2.1)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 01 25 0228

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-01-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 04340356 A	26-11-1992	JP 2919635 B2	12-07-1999
WO 9400906 A	06-01-1994	US 5231337 A	27-07-1993
		AU 4769393 A	24-01-1994
		CA 2139130 A1	06-01-1994
		EP 0647369 A1	12-04-1995
		WO 9400906 A1	06-01-1994
FR 67893 E	25-03-1958	NONE	
US 3878412 A	15-04-1975	AU 7303274 A	11-03-1976
		CA 1020612 A1	08-11-1977
		CH 588183 A5	31-05-1977
		DE 2443840 A1	31-07-1975
		FR 2244292 A1	11-04-1975
		GB 1487198 A	28-09-1977
		JP 50056512 A	17-05-1975
		ZA 7405705 A	29-10-1975
		US 3768051 A	23-10-1973
US 4002935 A	11-01-1977	NONE	
JP 2000166209 A	16-06-2000	NONE	

EPC FORM P0459

For more details about this annex see Official Journal of the European Patent Office, No. 12/82